



SAFETY POSITION SWITCH WITH SEPERATE ACTUATOR
 MOLDED-PLASTIC ENCLOSURE LATERAL AND FRONTAL
 SLOW-ACTION CONTACTS, 1NO+2NC, 3X(M20X1.5)
 EXTRACTION FORCE 5N DELIVERY WITHOUT ACTUATOR

Figure similar

Product designation	safety position switch
General technical data:	
Protection class IP	IP65
Equipment marking	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 • acc. to DIN EN 81346-2 	<p>B</p> <p>B</p>
Active principle	mechanical
Explosion protection category for dust	none
Explosion protection category for gas	none
Enclosure:	
Design of the housing	wide
Material of the enclosure	glass fiber reinforced thermoplast
Coating of the enclosure	Other types
Design of the housing acc. to standard	No
Drive Head:	
Design of the operating mechanism	without
Design of the switching function	positive opening
Connections/ Terminals:	
Type of electrical connection	screw-type terminals
Communication/ Protocol:	
Design of the interface	without
Ambient conditions:	
Ambient temperature	

- during operation

-30 ... +85 °C

Installation/ mounting/ dimensions:

Mounting type

screw fixing

Certificates/ approvals:

General Product Approval

Declaration of
Conformity

Shipping
Approval



CCC



CSA



UL



EG-Konf.



ABS

Shipping Approval

other



LRS



PRS



RINA

[Confirmation](#)

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE22430XX40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE22430XX40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE22430XX40&lang=en

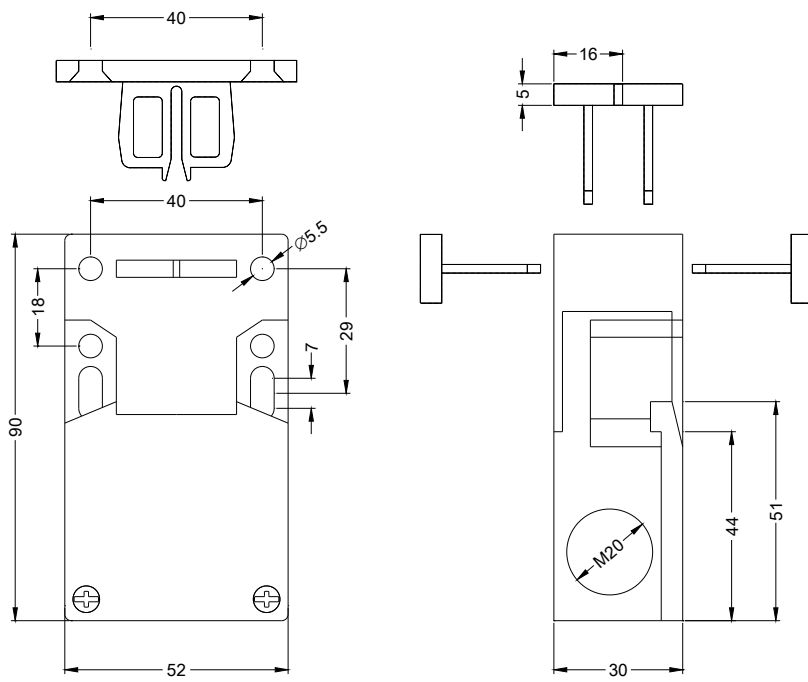

last modified:

27.04.2015