


PLUG CONNECTION

- pin #1: PTC
- pin #2: PTC
- pin #3: U
- pin #4: V
- pin #5: W

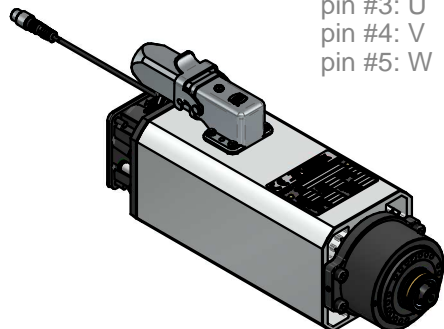

Power [kW]	1.1	Duty Cycle	S6 60%	Base speed [rpm]	18000	Base freq. [Hz]	300	Base voltage Δ [V]	220	Base voltage Y [V]		Protection	IP54	Ins. Cl.	F	
Min speed [rpm]	6000	Max speed [rpm]	24000	Max freq. [Hz]	400	Absorb. Δ [A]	4.3	Absorb. Y [A]		Part number on nameplate	COMC0410007					
Balancing according to ISO 1940 - G2.5 @ 24000 rpm	Balancing type		<input type="radio"/> full key <input type="radio"/> half key		Peso / weight		4.99 kg									
Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5mm							▽ = 0.8	▽ = 3.2	▽ = 12.5	~ = ∇	Title C041-A-DBS-HSK25C-SV					
rev. n°	description						date	signature	Customer Catalogo							
00	Emissione						18/07/2019	D. Bottarel	Drawing code COMC0410007							
drawn - date	approved - date	checked - date	sostituisce il		sostituito dal		foglio / sheet	scala			A4					
D. Bottarel - 18/07/2019	S. Perli - 18/07/2019	S. Perli - 18/07/2019					1 / 1	n.d.								