

# Connector - PV-C4M-S 2,5-6 (-)



1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm<sup>2</sup>, max. conductor cross section: 6 mm<sup>2</sup>, rated voltage: 1500 V DC, rated current: 35 A, Connection method: Spring-cage, Type of contact: Pin, min. cable diameter: 5 mm, max. cable diameter: 8 mm

## Your advantages

- Convenient, secure spring connection technology
- High yield, thanks to silver-plated contacts
- Convenient release without a special tool
- One-piece DC connector

## Commercial Data

Item number	1020775
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	ABLBBA
Product Key	ABLBBA
GTIN	4055626511283
Weight per Piece (including packing)	19,602 g
Weight per Piece (excluding packing)	19,602 g
Customs tariff number	85359000
Country of origin	IN

## Technical Data

### Notes

#### Safety note

##### Safety note

- **WARNING:** Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- **WARNING:** Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- **WARNING:** The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- Observe the corresponding technical data. You will find information:
  - o On the product
  - o On the packing label
  - o In the supplied documentation
  - o Online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) under the product
- The installation notes/Design In documents online on the download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)
- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
- Operate the connector only when it is fully plugged in and interlocked.
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.

# Connector - PV-C4M-S 2,5-6 (-)

1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.

## Product properties

Product type	Photovoltaic connector
Number of positions	1
Insertion force	45 N ±10 N

## Insulation characteristics

Protection class	II
Degree of pollution	2

## Electrical properties

Rated voltage (II/2)	1000 V
Rated voltage (III/2)	1500 V
Nominal voltage ATD	1500 V DC (II/2) in accordance with IEC 62852:2014/AMD1:2020 1500 V DC in accordance with UL 6703
Rated surge voltage	16 kV
Rated surge voltage (II/2)	12 kV
Rated surge voltage (III/2)	12 kV
Rated surge voltage (III/3)	16 kV
Rated current (6.0 mm <sup>2</sup> )	35 A (in accordance with IEC 62852:2014-11)
Rated current (4.0 mm <sup>2</sup> )	30 A (in accordance with IEC 62852:2014-11)
Rated current (2.5 mm <sup>2</sup> )	20 A (Nominal voltage at 1100 V)
Rated current	30 A (in accordance with UL 6703) 35 A (in accordance with UL 6703) 50 A (in accordance with UL 6703)
Contact resistance	0.45 mΩ
Contact resistance	≤ 0.45 mΩ (when plugged in (without cable))

## Dimensions

Dimensional drawing	
Width	20 mm
Height	27.4 mm
Length	82.6 mm

## Material specifications

Color	black
Color of the housing part	black
Material	PPE (Housing)
Flammability rating according to UL 94	V0

# Connector - PV-C4M-S 2,5-6 (-)



1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

Insulating material group	II
Insulating material	mPPE
Contact surface	Tin Sn
Cable seal material	EPDM
Contact material	Cu
Contact surface material	Ag
Contact carrier material	PA 6.6 V0
O-ring material	Elastosil LR 3065/50
Housing material	PPE

## Connector

Insertion/withdrawal cycles	100
-----------------------------	-----

## Cable / line

### Cable structure

Cable type	in accordance with IEC 62930
External cable diameter	5 mm ... 8 mm
	5 mm ... 8 mm
Single wire, cross section	2.5 mm <sup>2</sup> 6 mm <sup>2</sup> 14 AWG 10 AWG
Stripping length of the individual wire	15 mm

### Mechanical properties

Cable pull-out force	> 80 N
----------------------	--------

## Mechanical properties

### Mechanical data

Insertion force	45 N ±10 N
Withdrawal force	250 N ±50 N (when locked)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (when plugged in)	IP66 / IP68 (2 m / 24 h)
Degree of protection (not plugged in)	IP20
Degree of protection	IP66 / IP68 (2 m / 24 h)
Ambient temperature (operation)	-40 °C ... 85 °C (dependent on the derating curve)
Ambient temperature (assembly)	-5 °C ... 50 °C

## Standards and regulations

Standards/specifications	IEC 62852:2014/AMD1:2020
--------------------------	--------------------------


# Connector - PV-C4M-S 2,5-6 (-)

1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

## Drawings

Dimensional drawing

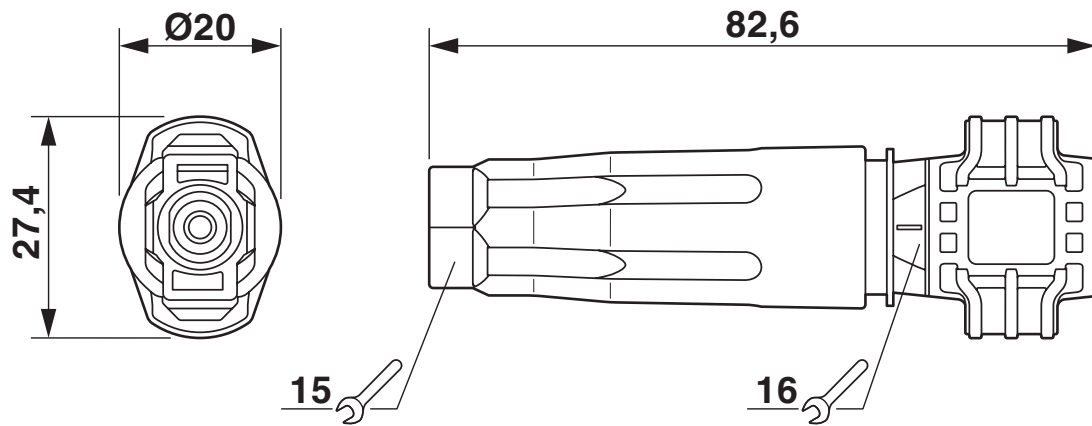


# Connector - PV-C4M-S 2,5-6 (-)




1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

## Approvals

	<b>UL Recognized</b> Approval ID: E477377-20180202				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$	
	1500 V	50 A	- 10	-	

	<b>EAC</b> Approval ID: B.01687				
---	------------------------------------	--	--	--	--

	<b>TÜV Rheinland</b> Approval ID: R 60126961				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$	
	1500 V		-	-	

# Connector - PV-C4M-S 2,5-6 (-)



1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

## Classifications

### ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

### ETIM

ETIM 8.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Connector - PV-C4M-S 2,5-6 (-)



1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



# Connector - PV-C4M-S 2,5-6 (-)

1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>



## Accessories

### Protective cap

Protective cap - PV-C PROTECTION CAP - 1785430

<https://www.phoenixcontact.com/nl/producten/1785430>

Photovoltaic connector, Range of articles: Sunclix, Protective cap, color: black. self-sealing, without interlock, set consisting of: 1 protective cap for connector side and 1 protective cap for coupling side



---

### Screwdriver

Screwdriver - SZF 1-0,6X3,5 - 1204517

<https://www.phoenixcontact.com/nl/producten/1204517>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



# Connector - PV-C4M-S 2,5-6 (-)

1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>

## Stripping pliers

Stripping pliers - QUICK WIREFOX 6 SC - 1207637

<https://www.phoenixcontact.com/nl/producten/1207637>



Stripping tool for short-circuit proof conductors, stripping range: 1.5 up to 6 mm<sup>2</sup>, wire cutting up to 6 mm<sup>2</sup> cable stopper up to 18 mm<sup>2</sup>

---

## Stripping tool

Stripping tool - WIREFOX-D SR 6-1 - 1212511

<https://www.phoenixcontact.com/nl/producten/1212511>



Stripping tool, for standard 2.5, 4, and 6 mm<sup>2</sup> solar cables, with 15 mm length stop, for SUNCLIX field connectors

# Connector - PV-C4M-S 2,5-6 (-)

1020775 | My ID: 4055626511283

<https://www.phoenixcontact.com/nl/producten/1020775>



## Filler plugs

Filler plugs - PV-C-PLUG-HV - 1623478

<https://www.phoenixcontact.com/nl/producten/1623478>



Photovoltaic connector, Range of articles: Sunclix, Filler plugs, housing material: PA 6

---

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT B.V.

Hengelder 56 6902 PA Zevenaar

Postbus 246 6900 AE Zevenaar

(0316) 59 17 20

[sales@phoenixcontact.nl](mailto:sales@phoenixcontact.nl)