
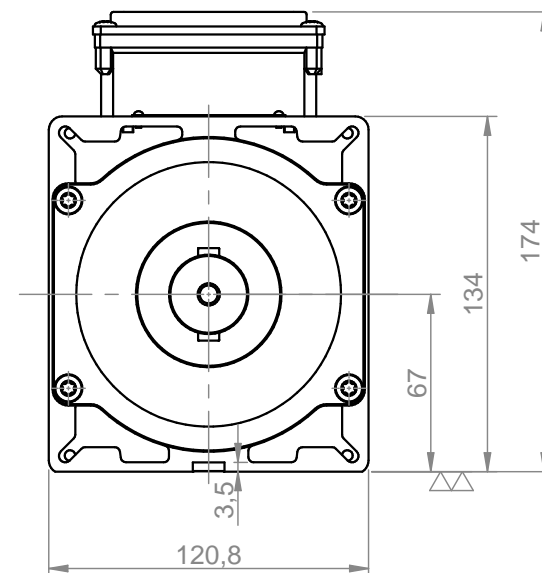






Linguetta UNI 6604-C
8 x 7 x 45 forata

M8 (prof.=20) RH

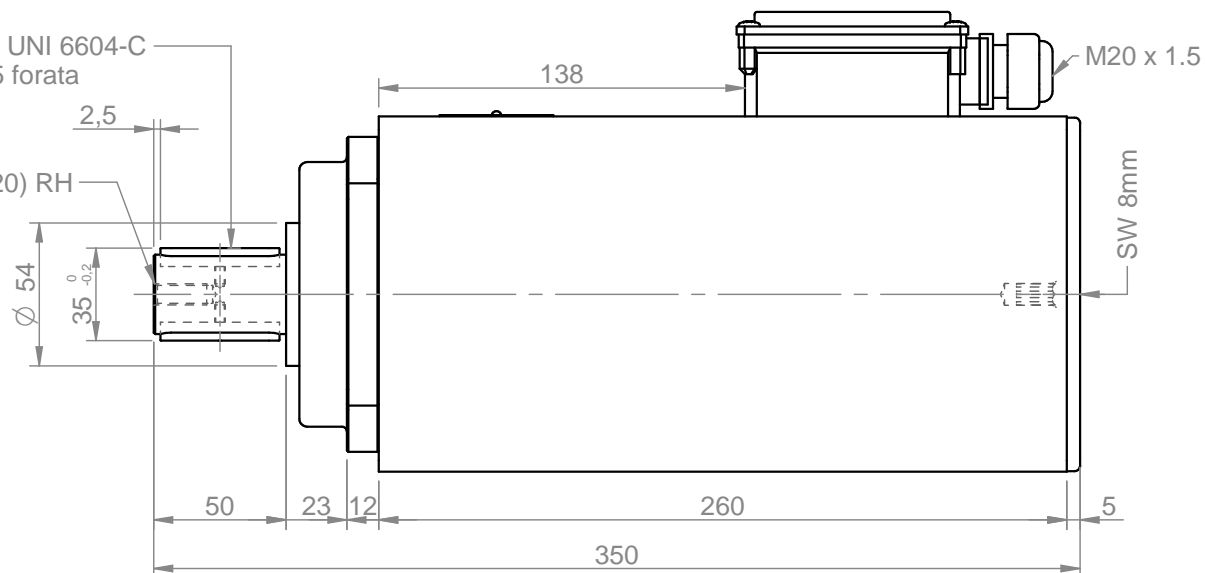

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]	 <p>Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com</p>		
3.3	S1	6000	100	220	12.8	380	7.4			
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]			
Min speed [rpm]		Max speed [rpm]	Max freq. [Hz]	Protection	Ins. Cl.	Part number on nameplate		Title 6067-D-SB-L50-FK-RH		
9000		150	IP54	F	COM60670081					
Balancing according to ISO 1940 - G2.5 @ 9000 rpm		Balancing type Full Key		tool type  full key	tool type  half key	Peso / weight 17.53 kg				
rev. n°	description			date	signature	Customer	Drawing code			
00	Emissione			13/04/2021	D. Bottarel	Catalogo	COM60670081			
Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302								foglio / sheet 1 / 1	scala n.d.	
drawn - date	approved - date	checked - date	sostituisce il		sostituito dal					
M. Giacometti - 13/04/2021	S. Perli - 13/04/2021	S. Perli - 13/04/2021								